

BIANCO **iCON**
SERIESTANKS

**iCON Packaged
Pump Stations**



BIANCO **iCON**
SERIES

BIANCO **CON**
SERIESPUMPS

BIANCO **CON**
SERIESDRIVES

BIANCO **iCON**
SERIESCONTROLS

BIANCO **iCON**
SERIESFILTRATION

iCON Packaged Pump Stations

Introducing the Bianco iCON range of Packaged Pump Stations.

The iCON Packaged Pump Station is suitable for installation in various Domestic and Industrial Applications. Packaged Pump Stations are generally used in areas where gravity drainage to waste water services are not available. The iCON pump station is designed to withstand ground and water pressure when installed correctly and according to the installation instructions. It has smooth internal walls and an optimum collection area to aid in the removal of waste water and prevents smells and septicity.

Bianco iCON Series Pump Stations conform to Product Standard - AS/NZS 1546.1:2008 with certification available upon request. Other approvals have also been obtained in certain states which are also available upon request.

The Bianco iCON pump station is moulded in polyethylene. Installations with either single or dual pumps systems for Storm Water, Drainage or Sewage applications are possible.

Plumbing options include free standing or guide rail installations depending on site requirements. The iCON Packaged Pump Station is supplied as standard with a Polyethylene Lid with the option of class B or class D lids available, depending on the size of the tank. Automated control of the system is possible through level input signals normally provided by means of float switches connected to a pump control panel (see page 6) and set at the required levels inside the tank. Options other than float switches are available upon request. Isolation valves and non-return valves are usually included in our packed pump stations but should be specified at the time of the quotation.



iCON Packaged Pump Stations | SPECIFICATIONS

600L Polyethylene Pump Station


Model No	BIA-ICON600
Depth	800mm (excluding lid)
Diameter	1200mm
Access cover	600mm diameter
Approximate weight	45kg (excluding plumbing and pump)

Available in

- BIA-ICON600 Tank only
- BIA-ICON600 Tank with single free standing plumbing
- BIA-ICON600 Tank with single plumbing and guide rails
- BIA-ICON600 Tank with dual free standing plumbing
- BIA-ICON600 Tank with dual plumbing and guide rails

Tanks are supplied as standard with polyethylene lids and are available with lid options as follows:

- > Class B
- > Class D
- > Storm Water grate



Risers are available as an optional extra (550mm).

Inlet plumbing to be installed by plumber on site.

Applications

Raw sewage	Effluent
Trade Waste	Storm Water

900L Polyethylene Pump Station


Model No	BIA-ICON900
Depth	1210mm (excluding lid)
Diameter	1200mm
Access cover	600mm diameter
Approximate weight	55kg (excluding plumbing and pump)

Available in

- BIA-ICON900 Tank only
- BIA-ICON900 Tank with single free standing plumbing
- BIA-ICON900 Tank with single plumbing and guide rails
- BIA-ICON900 Tank with dual free standing plumbing
- BIA-ICON900 Tank with dual plumbing and guide rails

Tanks are supplied as standard with polyethylene lids and are available with lid options as follows:

- > Class B
- > Class D
- > Storm Water grate

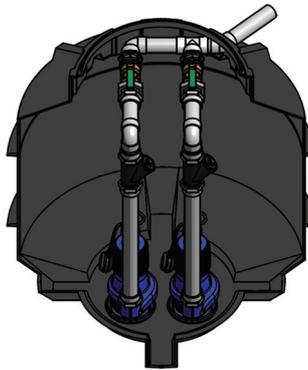

Risers are available as an optional extra (550mm).

Inlet plumbing to be installed by plumber on site.

Applications

Raw sewage	Effluent
Trade Waste	Storm Water

1200L Polyethylene Pump Station


Model No	BIA-ICON1200
Depth	1610mm (excluding lid)
Diameter	1200mm
Access cover	600mm diameter
Approximate weight	75kg (excluding plumbing and pump)

Available in

- BIA-ICON1200 Tank only
- BIA-ICON1200 Tank with single free standing plumbing
- BIA-ICON1200 Tank with single plumbing and guide rails
- BIA-ICON1200 Tank with dual free standing plumbing
- BIA-ICON1200 Tank with dual plumbing and guide rails

Tanks are supplied as standard with polyethylene lids and are available with lid options as follows:

- > Class B
- > Class D
- > Storm Water grate

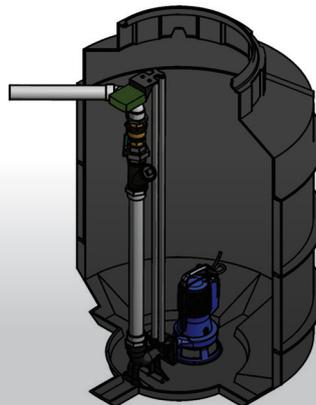

Risers are available as an optional extra (550mm).

Inlet plumbing to be installed by plumber on site.

Applications

Raw sewage	Effluent
Trade Waste	Storm Water



2700L Polyethylene Pump Station

Model No	BIA-ICON2700
Depth	1690mm (excluding lid)
Diameter	2080mm
Access cover	1565mm diameter
Approximate weight	130kg (excluding plumbing and pump)

Available in


- BIA-ICON1200 Tank only
- BIA-ICON1200 Tank with single free standing plumbing
- BIA-ICON1200 Tank with single plumbing and guide rails
- BIA-ICON1200 Tank with dual free standing plumbing
- BIA-ICON1200 Tank with dual plumbing and guide rails

Tanks are supplied as standard with polyethylene lids and are available with lid options as follows:

- > Class B
- > Storm Water grate

Risers are available as an optional extra (550mm).

Inlet plumbing to be installed by plumber on site.

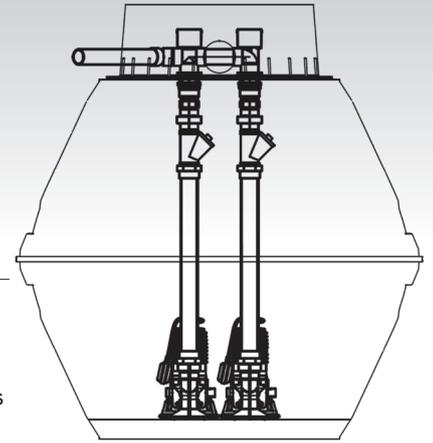

Applications

- Raw sewage
- Trade Waste
- Effluent
- Storm Water

3750L Polyethylene Pump Station

Model No	BIA-ICON3750
Depth	1880mm (excluding lid)
Diameter	2280mm
Access cover	600mm diameter
Approximate weight	160kg (excluding plumbing and pump)

Available in


- BIA-ICON3750 Tank only
- BIA-ICON3750 Tank with single free standing plumbing
- BIA-ICON3750 Tank with single plumbing and guide rails
- BIA-ICON3750 Tank with dual free standing plumbing
- BIA-ICON3750 Tank with dual plumbing and guide rails

Tanks are supplied as standard with polyethylene lids and are available with lid options as follows:

- > Class B
- > Storm Water grate

Risers are available as an optional extra (550mm).

Inlet plumbing to be installed by plumber on site.

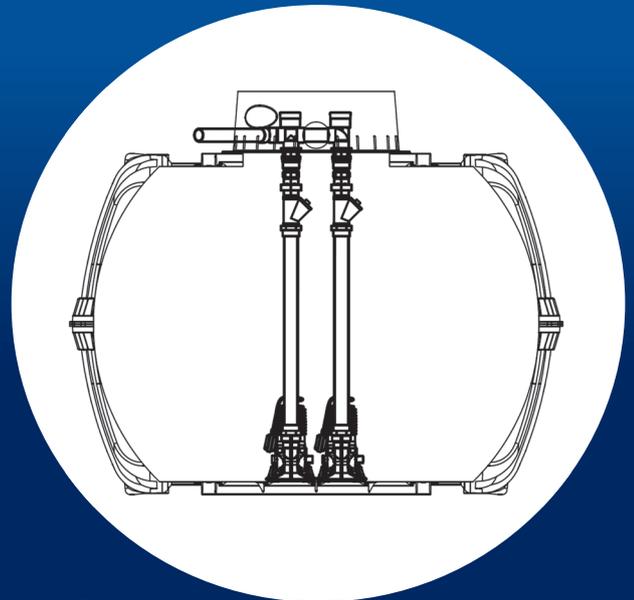

Applications

- Raw sewage
- Trade Waste
- Effluent
- Storm Water

4800L Polyethylene Pump Station

Model No	BIA-ICON4800
Depth	2110mm (excluding lid)
Length	2280mm
Width	1985mm
Access cover	600mm diameter
Approximate weight	195kg (excluding plumbing and pump)

Available in


- BIA-ICON4800 Tank only
- BIA-ICON4800 Tank with single free standing plumbing
- BIA-ICON4800 Tank with single plumbing and guide rails
- BIA-ICON4800 Tank with dual free standing plumbing
- BIA-ICON4800 Tank with dual plumbing and guide rails

Tanks are supplied as standard with polyethylene lids and are available with lid options as follows:

- > Class B
- > Storm Water grate

Risers are available as an optional extra (550mm).

Inlet plumbing to be installed by plumber on site.

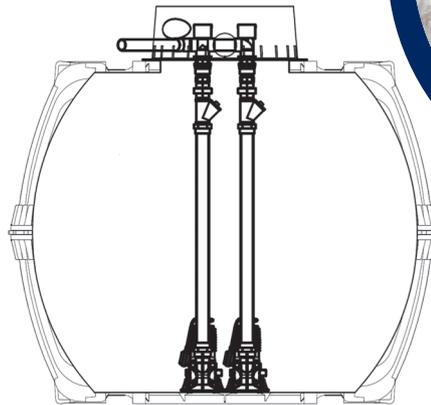

Applications

- Raw sewage
- Trade Waste
- Effluent
- Storm Water

6500L Polyethylene Pump Station

Model No	BIA-ICON6500
Depth	2390mm (excluding lid)
Length	2390mm
Width	2190mm
Access cover	600mm diameter
Approximate weight	230kg (excluding plumbing and pump)

Available in


- BIA-ICON6500 Tank only
- BIA-ICON6500 Tank with single free standing plumbing
- BIA-ICON6500 Tank with single plumbing and guide rails
- BIA-ICON6500 Tank with dual free standing plumbing
- BIA-ICON6500 Tank with dual plumbing and guide rails

Tanks are supplied as standard with polyethylene lids and are available with lid options as follows:

- > Class B
- > Storm Water grate

Risers are available as an optional extra (550mm).

Inlet plumbing to be installed by plumber on site.

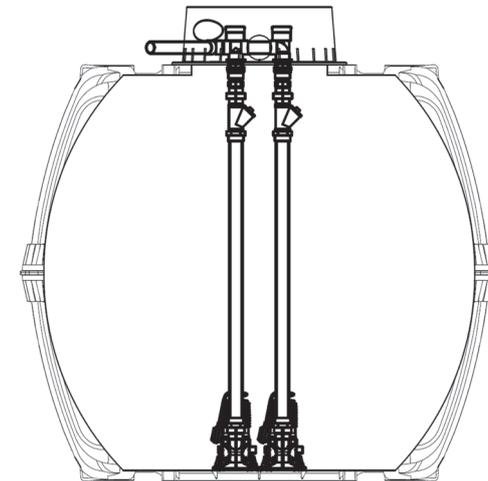

Applications

- Raw sewage
- Trade Waste
- Effluent
- Storm Water



Lid options



Class B Grate



Class B



Class D

Control Panel

Single Pump Control

SPC1 2.2kW
SPC3 4kW, 11kW, 15kW



Dual pump control

DPC1 2.2kW
DPC3 4kW, 11kW, 15kW



Alarm

iAlarm High Level



WHITE INTERNATIONAL PTY LTD

52-60 Ashford Ave Milperra NSW 2214
PO Box 304 Milperra LPO NSW 2214
Phone 02 9783 6000 Fax 02 9783 6001
Customer Service Hotline 1300 783 601
Email Sales: pumpsales@whiteint.com.au
General info: info@whiteint.com.au
www.whiteint.com.au

WHITE INTERNATIONAL NZ LTD

15G Kerwyn Avenue, East Tamaki
Auckland 2013, New Zealand
Phone 09 579 9777 Fax 09 579 7775
Customer Service Hotline 0800 509 506
Customer Service Faxline 0800 804 344
Email Sales: sales@whiteint.co.nz
General info: info@whiteint.co.nz
www.whiteint.co.nz

