

Receiver

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

From

 -
 -
 -

Item n° :

60122627

Model :

DIVERTRON X 1200 M

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water

Fluid Temperature : 20 °C

Density : 62.315 lb/ft³

Kinematic viscosity : 1.0769E-5 ft²/s

Vapor pressure : 2.2045 kPa

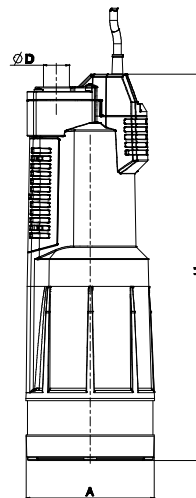
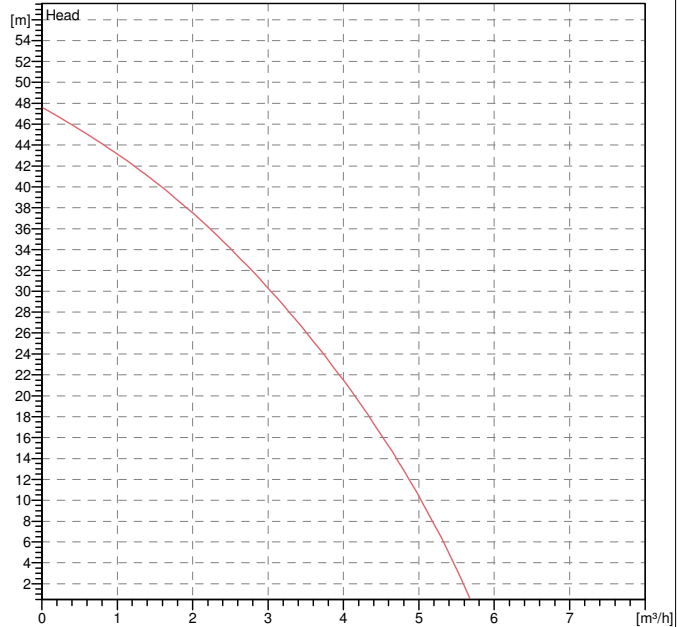
Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body	Technopolymer
Impeller	Technopolymer
Diffuser	Technopolymer
OR ring	NBR
Suction filter	Stainless Steel AISI 304
Motor shaft	AISI 416
Motor casing	Aluminium

Curve tolerance according to ISO 9906

Motor data

Motor brand :	DAB	
Nominal power P2 :	1.0058 hp	
Rated voltage :	1~ 220-240 V	50 Hz
Nominal current :	4.8 A	
Number of poles :	2	
Rated speed :	2800 rpm	
Degree of protection :	IP X8	

Weight : 24.25 lb

Dimensions in mm

Dimension	Value (mm)				
A	150				
D	30				
H	480				

Pump connection

 Suction side : /
 Discharge side : /



PERFORMANCE CURVES

18-08-2016

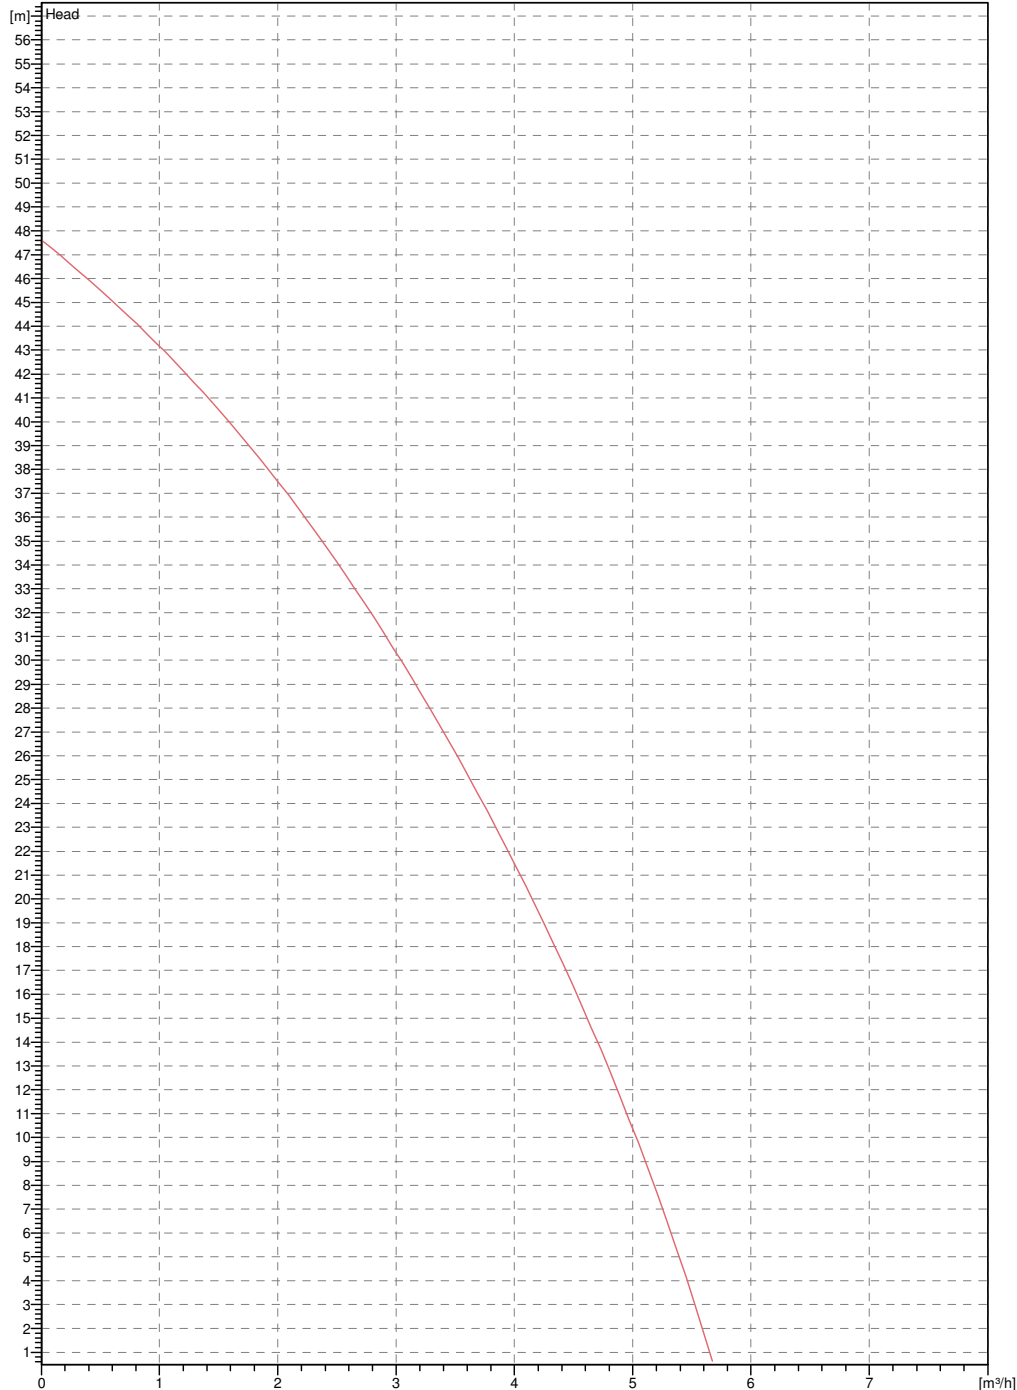
Page 2 / 3

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

	Receiver	From
Society		-
Reference		-
Address		-
Phone		
Fax		
E-mail		

DIVERTRON X 1200 M

Curve tolerance according to ISO 9906



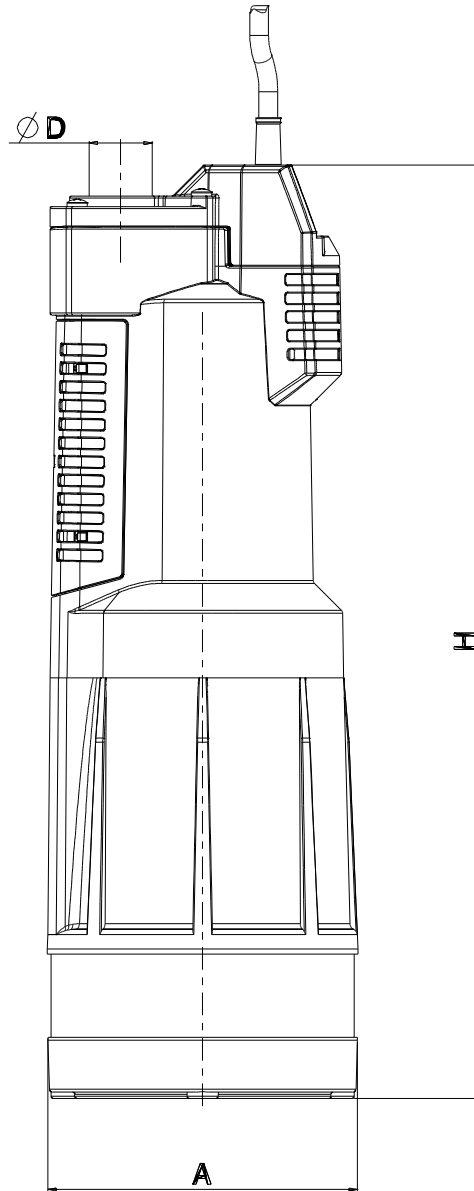
Hydraulic data (duty point)

Suction side :	Discharge side :	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 18-08-2016	

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

DIVERTRON X 1200 M


Dimensions in mm

1	A	150				
2	D	30				
3	H	480				

Pump connection

Suction

Discharge

Project

Project ID

Created by

Created on

18-08-2016