



PRODUCT DETAILS

The Bianco LSC530 is a manually operated, light duty, occasional use pump suitable for pumping mostly clean water with minimum soft solids or other contamination

The LSC530 is a 'puddle sucker' type pump. Once primed and pumping, it will pump down to depths less than 3mm making it ideal for basement, garage or pool drainage applications.

BENEFITS

- Light weight - easy to lift and lower
- Compact and able to be employed in sumps where space is limited

FEATURES


- Automatic Operation
- Quality pump materials and construction to ensure reliable operation
- Industrial grade coating
- 10m H07RN-F Neoprene power lead and float lead
- Easy to install and use

TECHNICAL DATA

RATED POWER (W)	530W
MAX. FLOW [LPM]	170 l/min
MAX. HEAD	11m
WORKING TEMPERATURE	< 40°C
LIQUID TEMPERATURE	3°C - 40°C
MAX. IMMERSION DEPTH	7m
MAX DIA. OF PARTICLE	< 2mm
MOTOR DUTY	S1 Continuous
MOTOR PROTECTION LEVEL	Class B
MOTOR PROTECTION	In-built auto re-setting thermal overload
CAPCITOR	10 uF +/-5% 450V
MOTOR SHAFT	Stainless Steel 201

RATED VOLTAGE	220V - 240V 50Hz
RATED CURRENT	2.0A @230V
POWER CABLE TYPE	10m H07RN-F
PROTECTION CLASS	IPX8
IMPELLERS	Single Impeller
HYDRAULIC BODY	Coated AISi12
INLET STRAINER	No
OUTLET	1" DN Hose tail
MECHANICAL SEAL	Graphite Ceramic
AUTOMATION FUNCTION	N/A - Manual operation
NET WEIGHT (KG)	Pump Only 13.5kg
PACKAGE DIMENSION (MM)	220L x 220W x 340H

CURVE

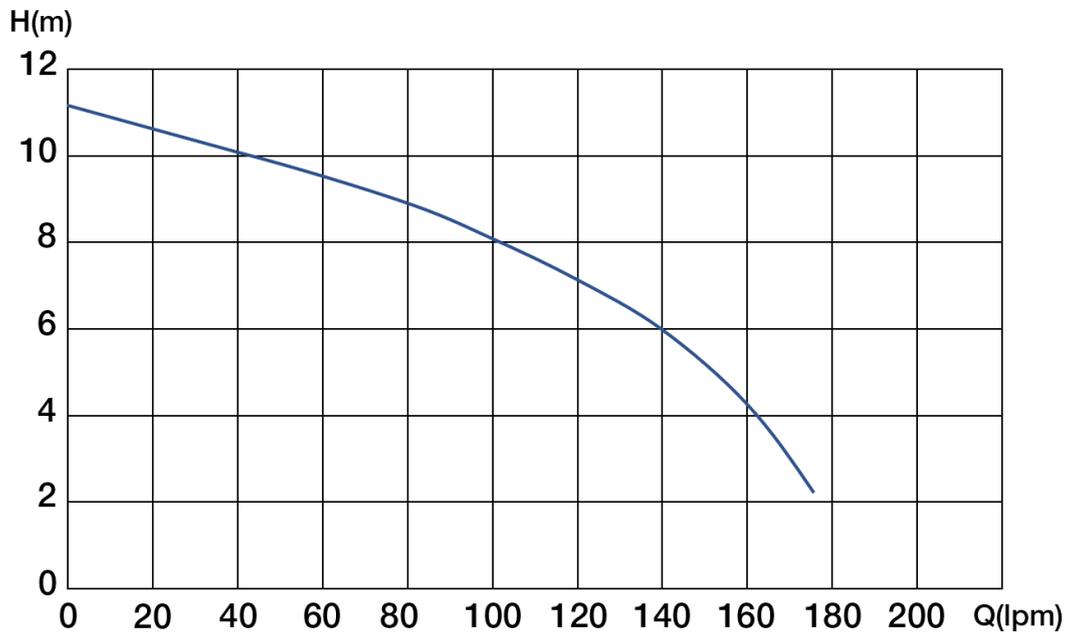

DIMENSIONS

Height


335mm high

Outlet

1" DN hose tail

Base Diameter

195mm

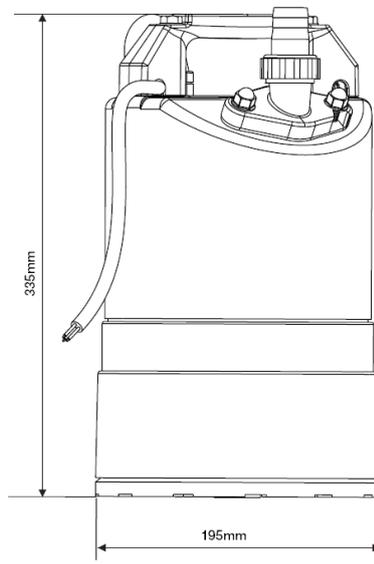

WARRANTY / CERTIFICATIONS

