

PRODUCT DETAILS

The DAB JINOX82M is a stainless steel, self-priming centrifugal pressure pump with excellent suction capacity even when there are air bubbles in the water.

Particularly suited to water supply in domestic installations, small-scale agriculture, gardening and wherever self-priming operation is required.

DAB Jinox pumps are renowned for their unique self priming and extraordinary deep suction capability; up to 8 metres at sea level.



APPLICATIONS

- Household water supply - small to medium dwellings
- Light garden irrigation
- Water transfer
- Washing systems
- Pressure boosting

FEATURES


- Motor support in cast iron, technopolymer impeller, diffuser, Venturi tube and sand guard. Stainless steel adjustment rings and pump body
- Carbon/ceramic mechanical seal.
- Asynchronous motor closed and cooled by external ventilation. Max Ambient temp 40 deg C
- Built-in thermal and current overload protection and a capacitor permanently on in the single-phase versions.

TECHNICAL DATA

OUTPUT POWER (KW)	0.6kW P2
MAX. HEAD [M]	47M
MAX. FLOW L/MIN	60 l/min
MAX PRESSURE	8 bar
LIQUID TEMPERATURE	2 - 35 deg C
MOTOR	Asynchronous TEFC
MOTOR INSULATION	F Class insulation
MOTOR PROTECTION	In-built thermal overload
PROTECTION CLASS	IP44. Terminal board I.P.55


RATED VOLTAGE	220 - 240V 1Ph 50 Hz
RATED CURRENT	3.8A
CAPACITOR	12.5uF 450V
POWER CABLE	2m long 10 amp rated H05 flex 10 amp 3 pin plug
PUMP BODY	AISI 304 X5 Cr Ni 1810 UNI 6900/71
INTERNALS	Technopolymer A
MECHANICAL SEAL	Carbon/Ceramic
PACKAGE DIMENSION	L470 x W240 x H240mm
GROSS WEIGHT (KG)	7.8kg

CURVE

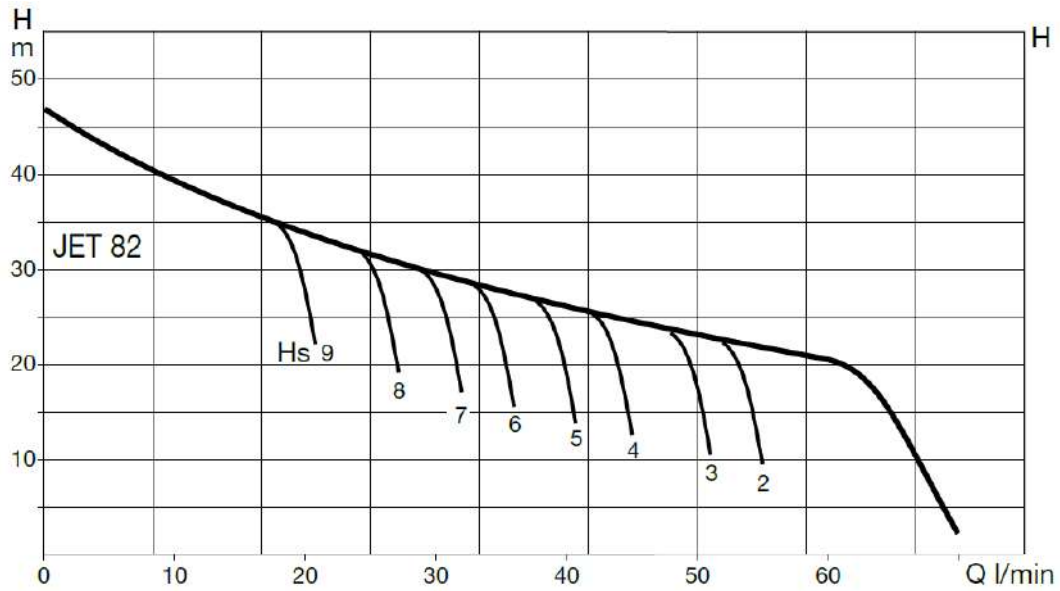


DIMENSIONS

A	406
B	170
C	122
E	208
F	14
G	111
H	198
H2	144
I	Dia 9
DNA	1" GAS
DNM	1" GAS

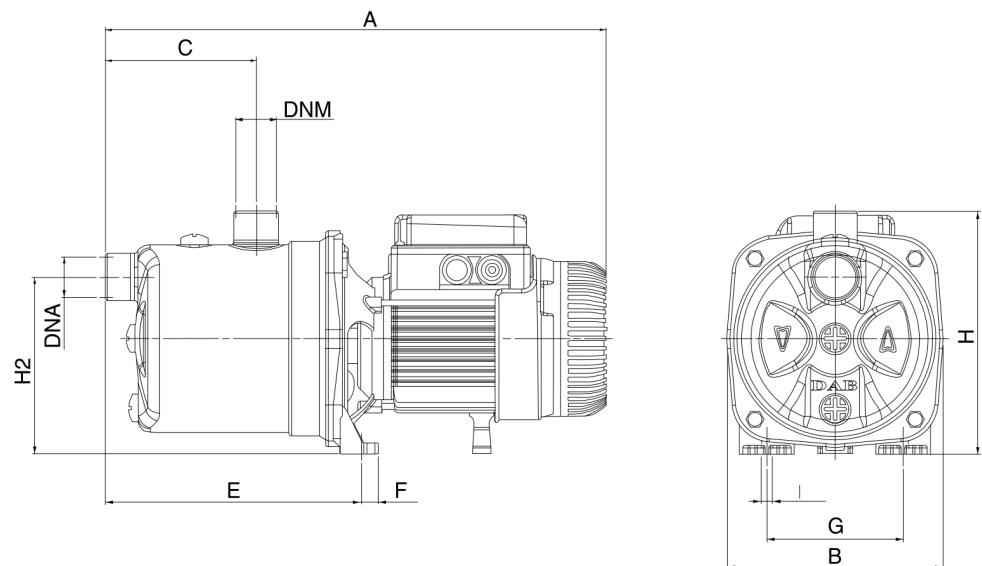

WARRANTY / CERTIFICATIONS



COMPLIES TO AUSTRALIAN
ELECTRICAL STANDARDS

