

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Motor Code :

60122752

Motor :

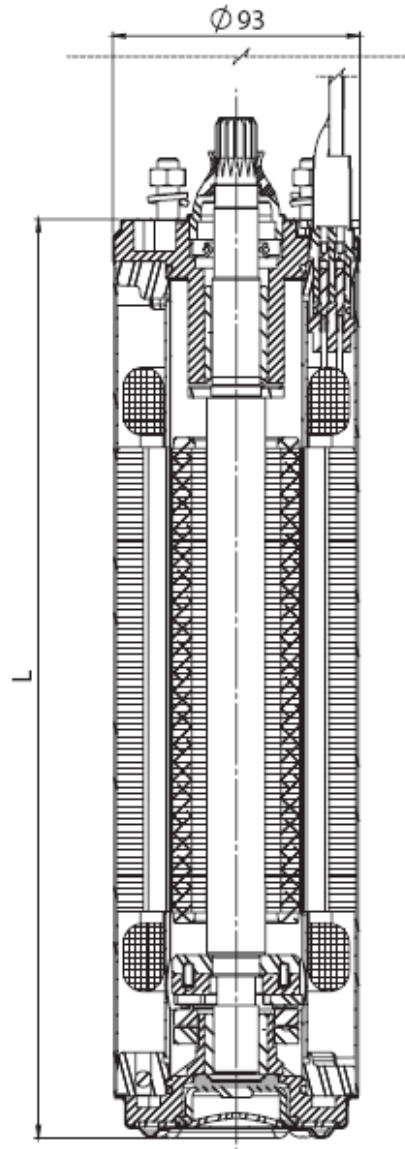
4GG 1,1 kW 400 V T

Materials

| | |
|----------------------------------|---------------------------------|
| Internal sleeve and outer casing | Stainless Steel AISI 304 |
| Stator | Stainless Steel AISI 304 L |
| Shaft extension | Stainless Steel AISI 304/Duplex |
| Upper support | Teflon coated cast iron |
| Bearing cover | Stainless Steel AISI 304 |
| Lip seal | Nbr |
| Gasket | Nbr |
| Lower support | Teflon coated cast iron |
| Bellow seal | EPDM |
| Thrust bearings | Stainless steel-Graphite |
| Valve | Stainless Steel AISI 304 |
| Cable | EPDM |
| Connector plug | Stainless Steel AISI 316 |
| Sand guard (fixed-mobile) | Nbr |
| Screws | Stainless Steel AISI 304 |
| Coolant | Antifreeze+Water |

Motor data

| | | | |
|-----------------------------------|----------------------|-------|--|
| Motor brand : | TESLA | | |
| Nominal power P2: | 1.1 kW | | |
| Rated speed : | 2830 rpm | | |
| Rated voltage : | 3~ 400 V | 50 Hz | |
| Nominal current : | 3.4 A | | |
| Degree of protection : | IP 68 | | |
| Inverter application : | Allowed | | |
| Power factor : | 0.76 | | |
| Efficiency : | 64 % | | |
| Cable section Ø mm ² : | 4x1,5 | | |
| Cable length m. : | 1,7 | | |
| Cooling flow : | min. 0,3 m/s at 35°C | | |


Weight : 9.1 kg

Dimensions in mm

| | | | | | |
|---|-----|--|--|--|--|
| L | 286 | | | | |
|---|-----|--|--|--|--|