

Receiver

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

From

 -
 -
 -

Motor Code :

60122755

Motor :

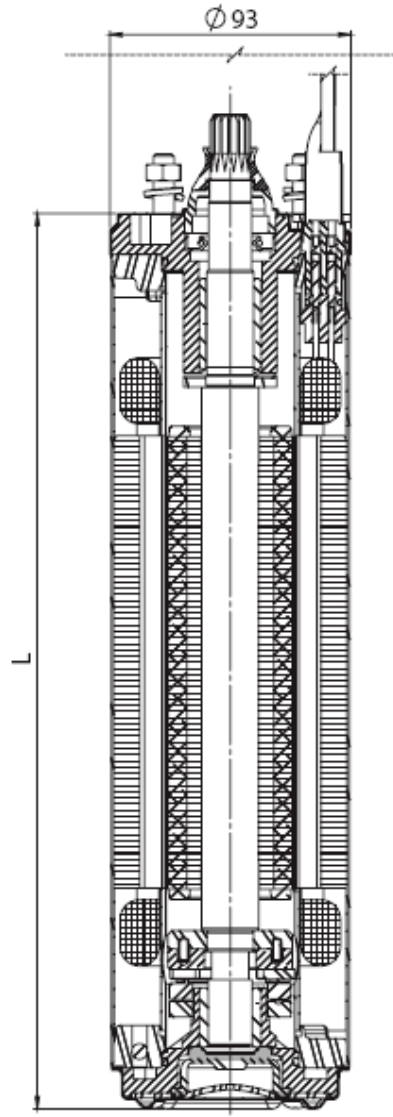
4GG 2.2 kW 230 V T

Materials

Internal sleeve and outer casing	Stainless Steel AISI 304
Stator	Stainless Steel AISI 304 L
Shaft extension	Stainless Steel AISI 304/Duplex
Upper support	Teflon coated cast iron
Bearing cover	Stainless Steel AISI 304
Lip seal	NBR
Gasket	NBR
Lower support	Teflon coated cast iron
Bellow seal	EPDM
Thrust bearings	Stainless steel-Graphite
Valve	Stainless Steel AISI 303
Cable	EPDM
Connector plug	Stainless Steel AISI 316
Sand guard (fixed-mobile)	NBR
Screws	Stainless Steel AISI 304
Coolant	Antifreeze+Water

Motor data

Motor brand :	TESLA		
Nominal power P2 :	2.2 kW		
Rated speed :	2820 rpm		
Rated voltage :	3~ 230 V	50 Hz	
Nominal current :	10.2 A		
Degree of protection :	IP 68		
Inverter application :	Allowed - min. 30Hz		
Power factor :	0.78		
Efficiency :	71 %		
Cable section Ø mm² :	4x1,5		
Cable length m :	1,7		
Cooling flow :	min. 0,3 m/s at 35°C		


Weight : 29.101 lb

Dimensions in mm

L	393				
---	-----	--	--	--	--