

**Receiver**
**From**

 Society  
 Reference  
 Address  
 Phone  
 Fax  
 E-mail

**Motor Code :**

60122760

**Motor :**

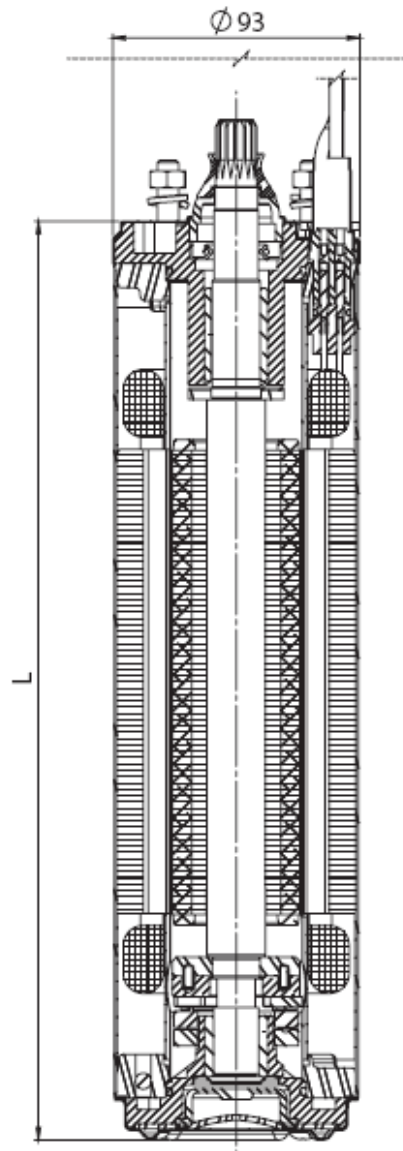
4GG 4 kW 400 V T

**Materials**

|                                  |                                 |
|----------------------------------|---------------------------------|
| Internal sleeve and outer casing | Stainless Steel AISI 304        |
| Stator                           | Stainless Steel AISI 304 L      |
| Shaft extension                  | Stainless Steel AISI 304/Duplex |
| Upper support                    | Teflon coated cast iron         |
| Bearing cover                    | Stainless Steel AISI 304        |
| Lip seal                         | Nbr                             |
| Gasket                           | Nbr                             |
| Lower support                    | Teflon coated cast iron         |
| Bellow seal                      | EPDM                            |
| Thrust bearings                  | Stainless steel-Graphite        |
| Valve                            | Stainless Steel AISI 304        |
| Cable                            | EPDM                            |
| Connector plug                   | Stainless Steel AISI 316        |
| Sand guard (fixed-mobile)        | Nbr                             |
| Screws                           | Stainless Steel AISI 304        |
| Coolant                          | Antifreeze+Water                |

**Motor data**

|                                   |                      |       |  |
|-----------------------------------|----------------------|-------|--|
| Motor brand :                     | TESLA                |       |  |
| Nominal power P2:                 | 4 kW                 |       |  |
| Rated speed :                     | 2850 rpm             |       |  |
| Rated voltage :                   | 3~ 400 V             | 50 Hz |  |
| Nominal current :                 | 10 A                 |       |  |
| Degree of protection :            | IP 68                |       |  |
| Inverter application :            | Allowed              |       |  |
| Power factor :                    | 0.79                 |       |  |
| Efficiency :                      | 75 %                 |       |  |
| Cable section Ø mm <sup>2</sup> : | 4x1,5                |       |  |
| Cable length m. :                 | 2,7                  |       |  |
| Cooling flow :                    | min. 0,3 m/s at 35°C |       |  |


**Weight :** 23 kg

**Dimensions in mm**

|   |     |  |  |  |  |
|---|-----|--|--|--|--|
| L | 614 |  |  |  |  |
|---|-----|--|--|--|--|