


GLOBAL WATER SOLUTIONS



All-Weather Pressure Tank

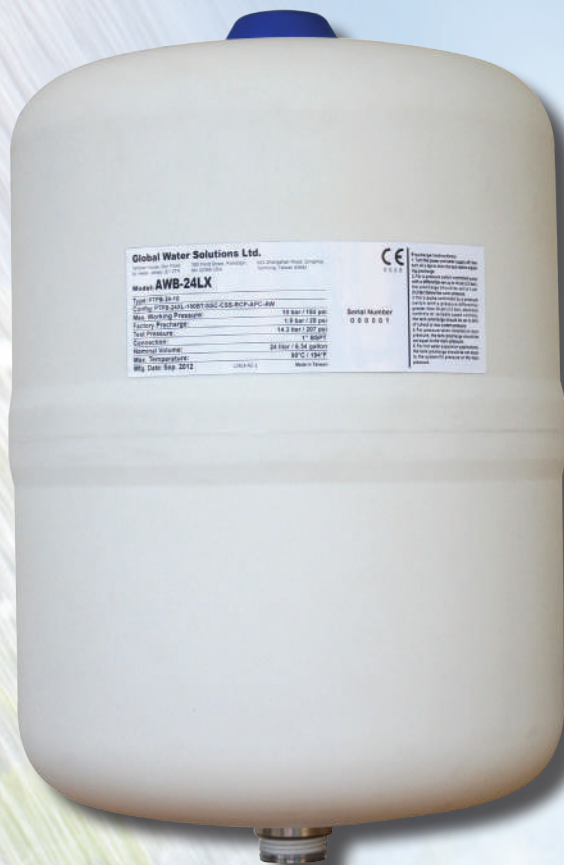

Global Water Solutions Ltd.		CE	0111
<small>1000 Southview Way, Suite 100, San Diego, CA 92108, USA</small>			
Model AWB-24LX			
Type	PTTB-3618		
Capacity	2719 gal. (10300 L)	10 bar / 150 psi	Serial Number
Max. Working Pressure	10 bar / 150 psi	10 bar / 150 psi	00001
Factory Precharge	8 bar / 120 psi		
Test Pressure	14.5 bar / 210 psi		
Connections			
Nominal Volume	24 liter / 6.3 gal.		
Max. Temperature	80°C / 180°F		
Wgt. Cont. Reg. 2015			



FEATURES

- Rugged Polypropylene outer shell
- 10 bar pressure rating
- Single diaphragm design
- Comprehensive testing
- Virgin Polypropylene liner
- Patented stainless steel water connection
- Leak free O-Ring sealed air valve
- Maintenance free

The **GWS All-Weather Pressure Tank** is constructed with a high grade steel tank encased in a rugged polypropylene outer shell. The patented PLASTEEL shell creates an impenetrable layer of protection that shields against the harshest of elements. Wind, rain, sleet or sun is no match for the All-Weather Pressure Tank, making it the perfect solution for marine and mining applications, as well as harsh environmental conditions. With the highest quality and all Major Global Approvals, the GWS All-Weather Pressure Tank represents the greatest innovation in pressure tank technology today.


GLOBAL WATER SOLUTIONS




SPECIFICATIONS

Part Number	Connection	Nominal Volume		Shipping (Box) Volume		Shipping (Box) Weight		Dimensions			
								A		B	
	BSP/ NPT SS Inline	L	gal	m ³	ft ³	kg	lbs	cm	in	cm	in
FLE-AWB18V	1"	18	4.8	0.03	1.18	5.04	9.26	42.5	16.7	27.6	10.9
FLE-AWB24V	1"	24	6.3	0.04	1.52	5.35	11.97	45.4	17.9	30.1	11.9

Tank Precharge: 1.9 bar / 28 psi
 Maximum Working Pressure: 10 bar / 150 psi
 Maximum Working Temperature: 90°C / 194°F

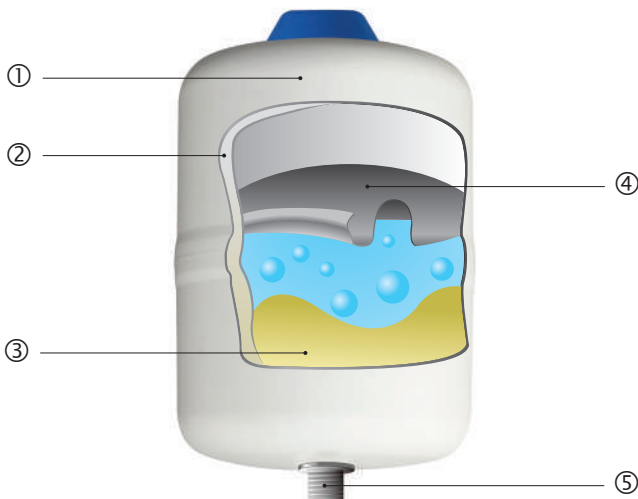

- ① Polypropylene shell
- ② Internal steel dome
- ③ Virgin polypropylene liner
- ④ High grade butyl diaphragm
- ⑤ Patented stainless steel water connection

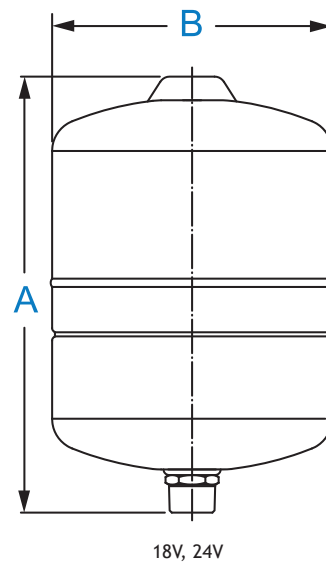

White International Pty Ltd
 Customer Service 1300 783 601
 Email: pumpsales@whiteint.com.au
 Fax: 02 9783 6003
www.whiteint.com.au

White International NZ Ltd
 Customer Service 0800 509 506
 Email: sales@whiteint.co.nz
 Fax: 0800 804 344
www.whiteint.co.nz