

# DAC V (1 1/2" - 2" and DN32 PN6 - DN50 PN10)

## Bottom coupling devices with vertical outlet

### General characteristics

- structure in GJL-250 cast iron
- seal in NBR rubber
- epoxy-vinyl paint
- full free passage
- complete with fitting for connection to polyethylene tube (Ø 63 mm)
- threaded outlet GAS 2" and GAS 2 1/2"
- complete with pipe guide and sliding flange with stainless steel fasteners
- allows the pump intake port to be kept at optimal height, meaning there is no need to provide a step in the bottom of the tank
- version with ball valve directly on the delivery port. This model comes with an incorporated breather valve for air venting



All product images are indicative only


### Models

**DAC-N G40V/G50-65V** Inlet for vertical delivery pumps GAS 1 1/2", outlet GAS 2" - 2 1/2"  
**DAC-N G50V/G50-65V** Inlet for vertical delivery pumps GAS 2", outlet GAS 2" - 2 1/2"  
 Both of the accessories have a fitting for a PE 63 tube (GTP) or a ball check valve (VAP) + breather valve

**DAC-N 32-50/G50-65V** Inlet DN32 PN6 and DN50 PN10, outlet GAS 2" and GAS 2 1/2"  
 The accessory comes supplied with a fitting for a PE 63 (GTP) tube

**DAC-N 32-50/G50V+VAP** Inlet DN32 PN6 and DN50 PN10, outlet GAS 2" (valve outlet diameter)  
 The accessory comes supplied with a 2" ball valve  
 For correct operation, the DAC structure must have an automatic air release valve.

### Overall dimensions and weights

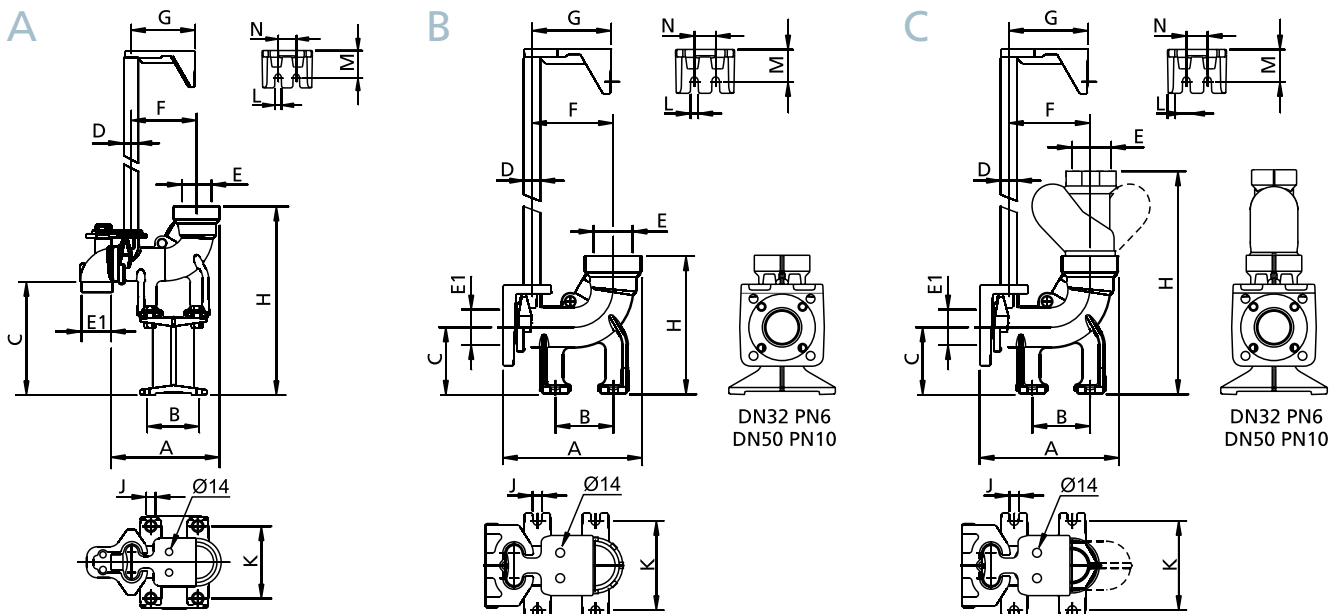

A	A	B	C	D	E	E1	F	G	H	J	K	L	M	N	Kg
DAC-N G40V/G50-65V	200	90	165	3/4"	G 2"-G 2 1/2"	G 1 1/2"	130	125	360	14	140	12	50	35	11
DAC-N G50V/G50-65V	200	90	220	3/4"	G 2"-G 2 1/2"	G 2"	130	125	360	14	140	12	50	35	11

B	A	B	C	D	E	E1	F	G	H	J	K	L	M	N	Kg
DAC-N 32-50/G50-65V	220	90	105	3/4"	G 2"-G 2 1/2"	50	130	125	215	14	140	12	50	35	8

C	A	B	C	D	E	E1	F	G	H	J	K	L	M	N	Kg
DAC-N 32-50/G50V+VAP	220	90	105	3/4"	G 2"	50	130	125	355	14	140	12	50	35	9

Dimensions in mm

All weights and dimensions are indicative only