PRODUCT DATA SHEET

ATLAS FILTRI CB-AF CARBON CARTRIDGE RANGE

ATL-CBAFPB10SX1MCR | 813176



PRODUCT DETAILS

Atlas Filtri CB-AF Carbon Cartridges are premium carbon block cartridges made from acid-washed coconut shell and catalytic carbon. Advanced catalytic carbon technology enhances chlorine reduction while improving the taste and odour of drinking water.

Four varieties of filter cartridges are available. This model specialises in heavy metal reduction.

Low-micron cartridges can also achieve filtration for fine sediment removal.

SPECIFICATIONS


CARTRIDGE SIZE	10” Standard
CONFIGURATION	SX — Double Open End
NOMINAL FILTRATION	1 micron
FILTER MEDIUM	Sintered carbon block
RECOMMENDED FLOW RATE	≤ 230 l/min
CAPACITY	Cl = 113,500L @ 3.8 l/min Pb = 6,800 L @ 1.9 l/min
OUTER DIAMETER (OD)	70 mm (2.4”)
INNER DIAMETER (ID)	26 mm (1.1”)
LENGTH	248 mm (10”)
WORKING TEMPERATURE	4 – 45°C

FEATURES & BENEFITS

- 1-micron nominal filtration reduces fine sediment and heavy metals (Lead)
- High-perfomance catalytic carbon technology
- Chlorine and by-product reduction
- Improved taste and odour
- Environmentally-friendly manufacturing process – lower greenhouse gas emissions
- Double open-end (DOE) configuration – fits 10” standard housings

Flow Rate vs Pressure Drop Δp

Tests carried on 10” elements type CB AF 10 SX. Testing mode: 20°C, 3 BAR

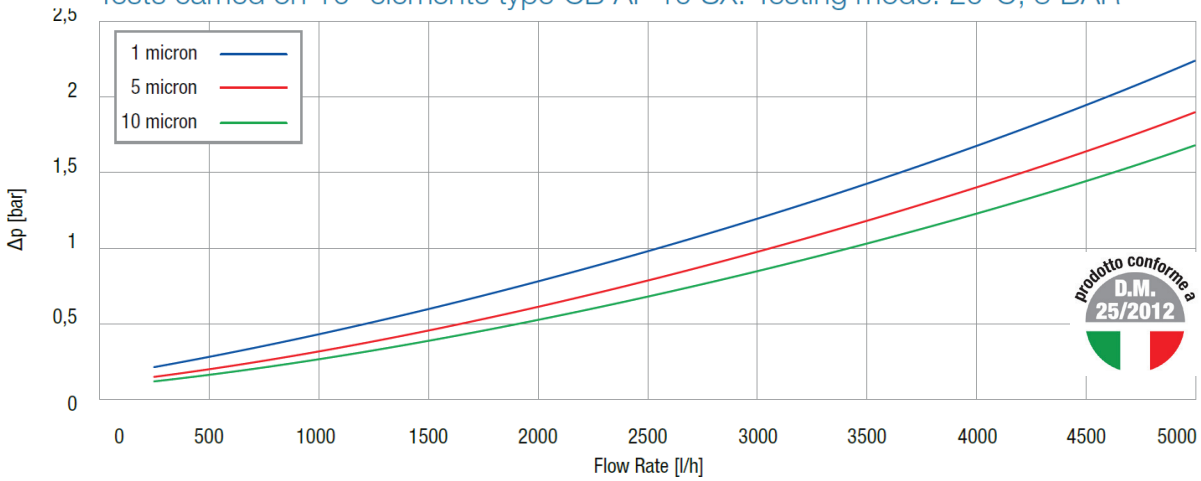

MAINTENANCE

Replacement interval depends on source water quality and flow rate.
Replace filters every 3-6 months OR when the difference between inlet and outlet pressure approaches 1 bar (pressure drop) with water running.