

MACERATORS & AUTOMATIC LIFTING STATIONS

a state and a state of the stat









FULFILL ALL 3 OF YOUR WISHES

GENIX is the new DAB macerator, designed to provide the maximum level of efficiency in the 3 main moments of its lifecycle:

- Quick and Easy Installation
- Comfort in Use with Low Noise
- Clean and Simplified Maintenance

This makes **GENIX** the new benchmark in the setup of a bathroom... where you never thought it was possible.



EVERYTHING YOU NEED IS INCLUDED!

GENIX is provided with everything you need for a quick and easy installation. Fittings with integrated non-return valves, hose clamps, hose adaptors, ground-fixing screws, anti-vibration rubber nubs, and an illustrated quick guide.

Visit the website whiteint.com.au to find out more information on the Genix range.



WaterMark Certificate number: WM-022990 Technical specification: WMTS-106





WHEREVER YOU DESIRE







GENIX is indispensable when the wastewater coming from toilets, showers, dishwashers or sinks cannot be expelled by gravity. DAB lifting stations can be installed wherever there is the wish to add a toilet or expel greywater during new installations, renovations or new constructions.

GENIX



S				ß				
GENIX	110 807410	✓		✓	•			
	130 807411	✓		✓	✓	✓	✓	~
	COMFORT110 807412	✓		✓	✓			
	COMFORT130 806101	✓		•	✓	✓	•	~
GENIX WL	WL110 807406		✓	~	•			
	WL130 807407		•	~	•	•	•	•
La state								

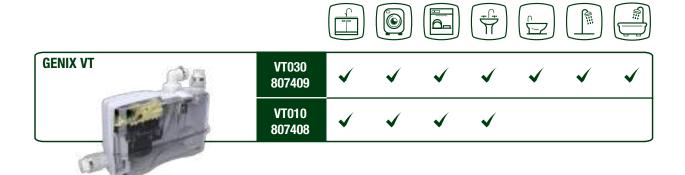

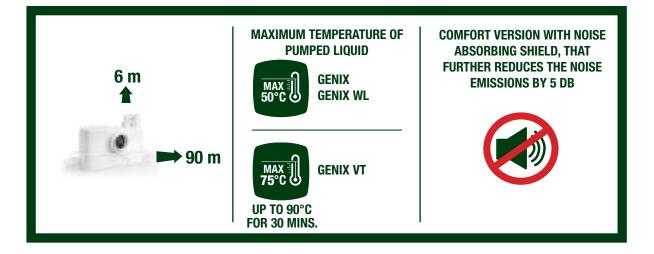





GENIX

WHITE GLOVE MAINTENANCE














ACCESSORIES



ACOUSTIC ALARM 807427

To connect on the control board. It signals the condition of water above limit and non functioning motor.





FLEXIBLE HOSE ADAPTER 807426


Composed by a 500mm flexible pipe, fitting and metal clamps to adapt the GENIX installation to competitors' models having the delivery pipe on the opposite side.





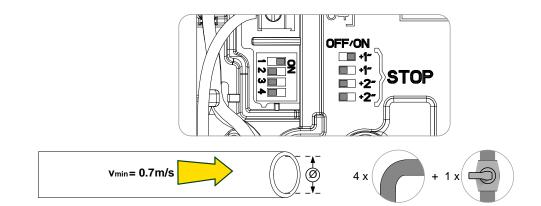

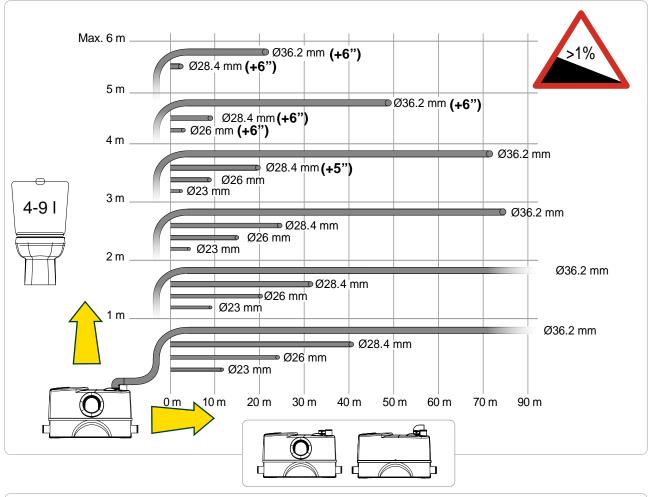

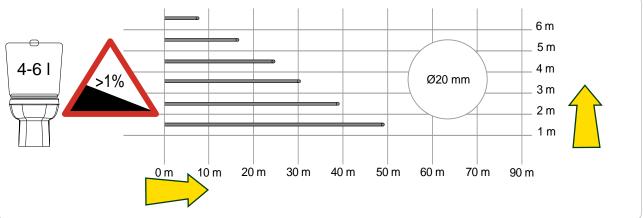





TECHNICAL DATA

	GENIX	GENIX WL	GENIX VT				
Inlets	GENIX 110: 1 + 1	GENIX WL 110: 1 + 1	GENIX VT 110: 1				
initers	GENIX 130: 1 + 3	GENIX WL 130: 1 + 3	GENIX VT 130: 3				
Liquid temperature range:	From 0° to +50°C.	From 0° to +50°C.	From 0° to +75°C. Up to 90°C for 30min.				
Liquid pumped:	Sewage water cont as regulated by	Grey wastewater without fecal matter. The unit is designed according to EN 12050-2.					
Third party certifications:	VDE-GS, LGA, VDE-EMC						
Tank capacity and delivery:	Approved for flush volu as regulated by	Tank volume: 10 Litres Delivery: Max. flow 130 I/min					
Max. pump head:	8 metres						
Max. system head:	6 metres						
International protection grade:	IP44						
Dimensions:	456mm (L) x 178mm (D) x 277mm (H)						
Dimensions of inlet:	DN 36/40/50						
Dimensions of discharge:	DN (22/25/28/32/36/40)						
Start and aton lovalor	Start: 72mm above bottom						
Start and stop levels:	Stop: 52mm above bottom						
Ambient temperature:	From +5°C to 40°C						
Noise level:	<70db(A) to 12050						
Duty class:	S3-50% 1min. (30 sec on; 30 sec off).						

Available from your local DAB distributor:

WHITE INTERNATIONAL PTY LTD

60 Ashford Ave Milperra NSW 2214 PO Box 304 Milperra NSW 2214 Phone 02 9783 6000 Fax 02 9783 6001 Customer Service 1300 783 601 Email Sales: pumpsales@whiteint.com.au www.whiteint.com.au

WHITE INTERNATIONAL NZ LTD

15G Kerwyn Avenue East Tamaki, Auckland 2013, New Zealand Phone 09 579 9777 Fax 09 579 7775 Customer Service 0800 509 506 Customer Service Fax 0800 804 344 Email Sales: sales@whiteint.co.nz www.whiteint.co.nz

Please always refer to our website for further technical information & new product innovations

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications. Product images are representations only.



Scan QR Code on your smart phone or iPad to save a digital version.

